




Swivel lifting point | MWK

- 360° Rotatable ball bearing lifting point with threaded end for various (lifting) purposes.
- Swiveling lifting points are rotatable and adjustable in multiple lifting directions.
- Due to the rotatable ball bearing you can swivel the lifting point under load.
- Always screw the swiveling lifting point completely into the surface.
- Make sure that the surface is strong enough for your lifting job.
- The working load limit of the lifting point depends on the lifting angle, on which the lifting point is used.

Type	MWK
Brand	Mitari
Material	High quality alloy steel
Thread	Metric
Category	Lifting points
Finish	Painted blue
Safety factor	4:1
Norm lifting point	NEN-EN 818-1
HS code	7326909000

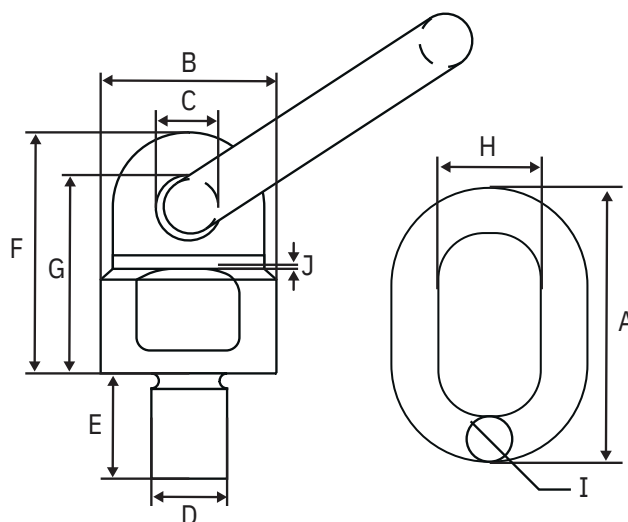

WLL 0°	A	B	C	DxE	F	G	H	I	J	Weight
600				M8x13						0.41
900	81	36	16.5	M10x18	52	44	30	14	1	0.43
1.000	81	36	16.5	M12x18	52	44	30	14	1	0.44
2.000	80	36	16.5	M14x20	52	44	30	14	1	0.45
2.000	80	36	16.5	M16x20	52	44	30	14	1	0.46
4.000	80	36	16.5	M20x30	52	44	30	14	1	0.96
6.300	102	50	19	M24x30	70	58	34	16	1	1.45
10.600	120	57	22	M30x35	80	67	40	18	1.5	2.17
11.800	116	80	28	M36x90	114	98.5	54	20	1.5	4.17
11.800	115	80	25	M39x60	109	89.5	54	22	2	3.65
15.000	116	80	27	M42x50	110	89.5	54	22	2	3.62
15.000	116	80	27	M48x50	110	89.5	54	25	2.5	4.02
25.000	116	80	27	M56x84	110	89.5	54	25	2.5	11.6
25.000	215	117	42	M64x95	165	135	70	32	2.5	12.4
	215	117	42		165	135	70	32	2.5	

Function - use | How to use



Tiltable



Rotatable



360° rotatable

Angle β	0°	0°	90°	90°	0° - 45°	45° - 60°	US	0° - 45°	45° - 60°	US

WLL (kg)

	0°	0°	90°	90°	0° - 45°	45° - 60°	US	0° - 45°	45° - 60°	US
M10	900	1.800	450	900	630	450	450	945	675	450
M12	1.000	2.000	500	1.000	700	500	500	1.050	750	500
M16	2.000	4.000	1.000	2.000	1.400	1.000	1.000	2.100	1.500	1.000
M20	4.000	8.000	2.000	4.000	2.800	2.000	2.000	4.200	3.000	2.000
M24	6.300	12.600	3.150	6.300	4.410	3.150	3.150	6.615	4.725	3.150
M30	10.600	21.200	5.300	10.600	7.420	5.300	5.300	11.130	7.950	5.300
M36	11.800	23.600	5.900	11.800	8.260	5.900	5.900	12.390	8.850	5.900
M42	15.000	30.000	7.500	15.000	10.500	7.500	7.500	15.750	11.250	7.500